KOUZLO PŘÍRODY | MAGIC OF NATURE

STRONGBOARDS JSD P5 / HSD P7

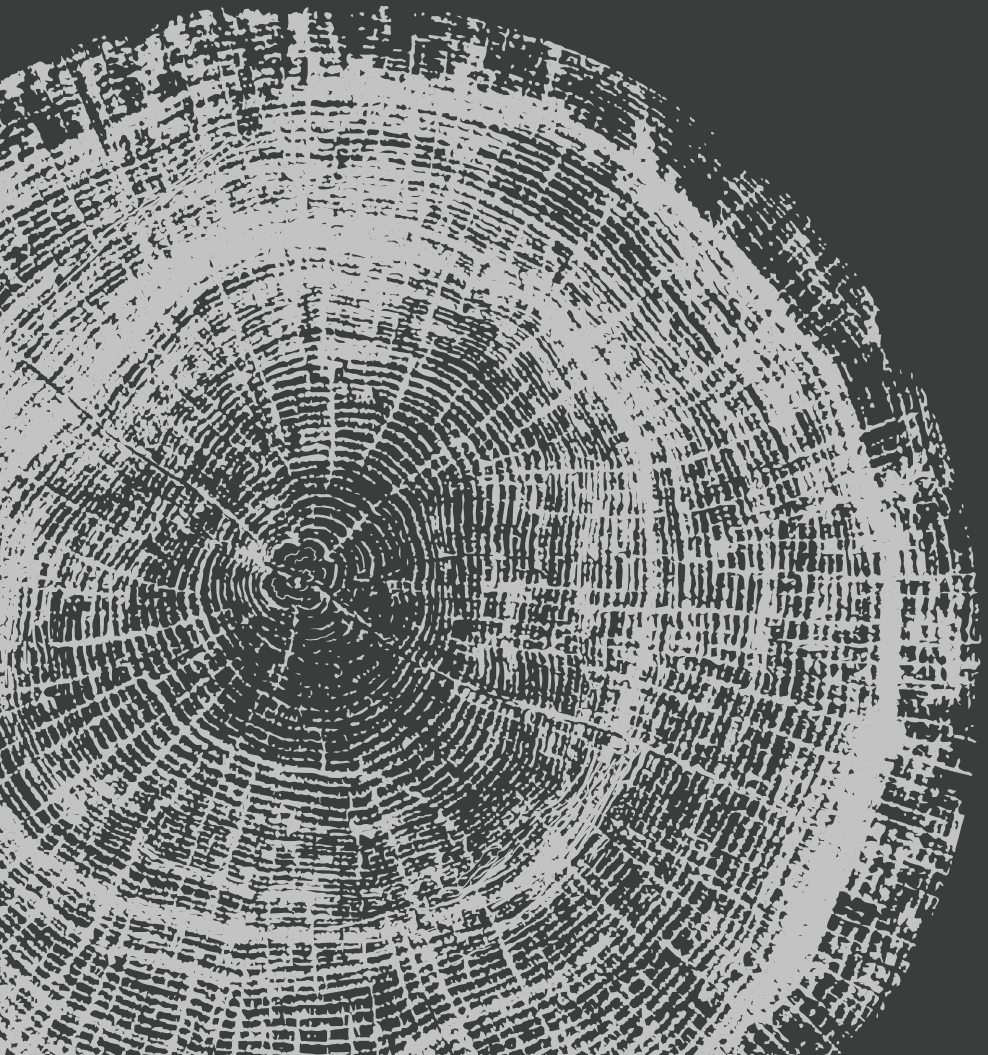

Dřevozpracující družstvo

5 REASONS,
TO CHOOSE DDL BOARDS

1. We use high-quality wood material from the Czech Republic.
2. The entire production process is permanently monitored by a quality control system.
3. Thanks to our sophisticated system of checkpoints, we carefully monitor every detail of the production process.
4. Quality control is carried out by our highly equipped laboratory.
5. We are even able to meet our customers' non-standard highly-specific requirements, always delivering first-class quality.

JSD BOARD TYPE P5

a single-layer sanded construction board for use in damp environments, comply with standard EN 312 and with a formaldehyde content corresponding to emission class E ½

HSD BOARD TYPE P7

a three-layer, sanded, heavy-duty chipboard for use in damp environments, comply with standard EN 312 and with a formaldehyde content corresponding to emission class E ½

WHY CHOOSE THE STRONGBOARDS JSD/HSD BOARDS

- A wide range of applications, from furniture manufacturing and the packaging industry to the construction sector
- The excellent properties of both board types. Uniformity with no sparse areas, dimensional stability, moisture resistance, low swelling.
- Both board types are made exclusively from Czech wood material and pure recycled material.
- All fasteners - screws, staples, nails and confirmat screws - hold exceptionally well in our Strongboards.
- Take-back scheme, recyclability.

WHERE CAN JSD AND HSD BOARDS BE USED

- ✓ **Construction** – decking, infill panels, furring walls and exhibition systems
- ✓ **Packaging industry** – transport packaging and boxes
- ✓ **Furniture industry** – suitable for high-wear upholstered furniture areas; can be substituted for certain types of plywood
- ✓ **Flooring industry** – JSD board with integrated heating/cooling system – a certified solution for modern flooring

WHAT SIZES
DO WE OFFER?

JSD sharp-edged		Packaging
format (mm)	2840 × 1830	
thickness	stock range	pcs per parcel and parcels per truck
8 mm	✓	65 / 12
10 mm	✓	52 / 12
12 mm	✓	44 / 12
15 mm	✓	36 / 12
18 mm	✓	30 / 12
22 mm	✓	25 / 12

HSD sharp-edged		Packaging
format (mm)	2840 × 1830	
thickness	stock range	pcs per parcel and parcels per truck
8 mm	★	65 / 11
10 mm	★	52 / 11
12 mm	✓	44 / 11
15 mm	✓	36 / 11
18 mm	✓	30 / 11
22 mm	★	25 / 11

JSD tongue – groove				Packaging		
format (mm)	1800×900	1800×675	1800×600	1800×900	1800×675	1800×600
thickness	stock range			pcs per parcel and parcels per truck		
12 mm	✗	✓	★		80/28	80/30
15 mm	✓	✓	★	87 / 14	65/28	65/30
18 mm	✓	✓	★	72 / 14	55/28	55/30
22 mm	✓	✓	★	60 / 14	45/28	45/30
25 mm	✗	✓	✗		40/28	40/30

HSD tongue – groove		Packaging
format (mm)	1800 × 675	
thickness	stock range	pcs per parcel and parcels per truck
12 mm	✓	80 / 25
15 mm	✓	65 /25
18 mm	✓	55 / 25
22 mm	★	45 / 25

✓ *in stock* ★ *only available to order* ✗ *unavailable*

We would be happy to provide you with a customised quote for non-standard dimensions.

We are pleased to offer you our 'GUIDE TO DIMENSIONING JSD AND HSD FLOORBOARDS'. The GUIDE is available at www.strongboards.cz or by scanning the QR code.

Dřevozpracující družstvo

Lukavec čp. 9, 394 26 Lukavec
Česká republika
ddl@ddl.cz / www.ddl.cz

For more information about the JSD P5 and HSD P7 boards, including technical data sheets and certificates, scan the QR code or visit **www.strongboards.cz**